

A close-up photograph of a metallic pump component, likely a rotor or stator, with several circular ports. The component is set against a dark blue background with a subtle grid pattern. The lighting highlights the metallic texture and the precision of the engineering.

HYDROCARBON ENGINEERING

Volume 13 Number 7 - July 2008

**The Powerful
Technology of
Sulzer Pumps**

THE HEART OF YOUR PROCESS

SULZER

GROUND CONTROL

Brian Duck, Callidus Technologies LLC, USA
discusses the computational fluid dynamic
modelling of a ground flare.



In 2004, construction of a major ethylene plant in the Middle East faced challenges to find workable methods to reduce flare emissions, flame visibility, and noise. Plant personnel solved their dilemma by turning to a company with expertise in environmental emission control and combustion that had pioneered and commercialised a ground mounted, multipoint flare system. By eliminating the need for an elevated flare, the proposed system not only resolved all issues, but provided the added benefit of enhanced service life.

By using computational fluid dynamic (CFD) simulation the flare system supplier predicted fence temperature, grade temperature, air flow to the burners, and the flame and radiation characteristics of the flare system. The flare burners were designed, fabricated, and tested on a fast track schedule to meet installation requirements of the 2004 plant startup.

Production tests and operating data confirm the flare system achieved the predicted CFD results, with all reduction criteria met, and the added advantage of enhanced operational efficiency that has resisted the failures associated with elevated flare systems.

Modelling approach and assumptions

The design engineers used specifications furnished by the plant to perform CFD modelling of the multipoint ground flare, utilising a flare system comprised of nearly 1000 burners, and confirmed temperature for the surrounding fence, grade temperature, air flow to the flare burners, flame length and the radiation

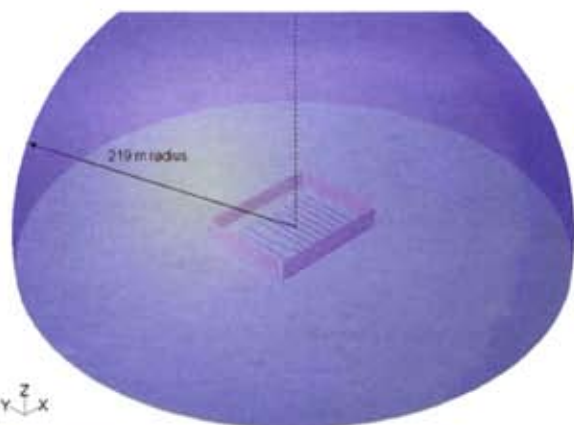


Figure 1. Pressure boundaries represented by the blue, semi-transparent surfaces.

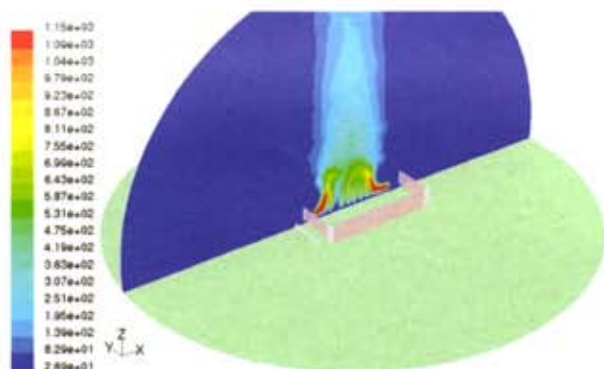


Figure 2. Contours of static temperature (°C)

characteristics of the flare system. After a three dimensional equipment representation was built using the CFD software, a mesh comprised of hexahedral and tetrahedral elements was used to achieve the finite volume solution of the flow field. The solver concurrently solved flow, turbulence, oxidation chemistry and radiation models over the entire area of calculation.

Waste gas flow was set at a rate of 14 105 MW. The air in the model was composed of 21% oxygen and 79% nitrogen, and set at a temperature of 27 °C. The waste gas lower heating value was set at 14 092 kcal/Nm³, the mole percent composition at 100% C₂H₄, and matched to the air temperature of 27 °C.

The large scale difference between the fuel gas orifices in the multipoint tip, and that of the domain limits required to capture the performance of the flare, is such that it is computationally infeasible to capture the detail at a sufficient level near the burner tips and carry the mesh throughout the domain. Therefore, the assumption made, in order to model the flare as a combined system, is that the area immediately around the burners can be represented by 'source terms' applied to a grid structure that is somewhat coarser than that required to dimensionally capture the fuel gas orifices.

The model for the Middle East ethylene plant verified flow to the flare was adequate, peak temperatures for the flare system were acceptable, and radiation was both within acceptable levels and dissipated within the boundaries of the flare fence. To verify that visibility limits were met, contours of static temperature, different contours of the mole fraction of CO₂, velocity vectors, and iso-surface rates that ranged from 1.58 - 15.77 kW/m² were used in the modelling. Peak fence temperatures were measured to be less than 250 °C on the interior of the inner fence structure. The peak mole fraction of ethylene measured at the top of the fence was 3.57 x 10⁻⁵. The model proved almost complete destruction before the flare met the top of the fence, as well as adequate oxygen supply to the burners. Peak radiation levels that were directly by the fence were predicted to be 3.14 x 10⁻¹ kW/m², dissipating to 1.86 x 10⁻¹ kW/m² in the far field regions.

Ethylene field flare specifications

With the employment of ground level linear burner configurations, visible flare emissions were eliminated. Dedicated gas lines send waste gas to the flare fields. These lines are in turn fed by a flare staging manifold.

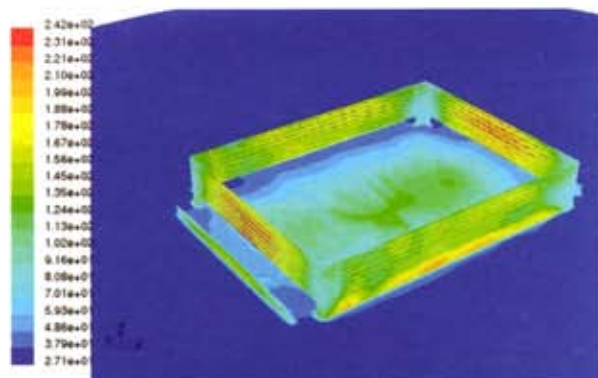


Figure 3. Contours of wall temperature (°C).

The first stage burners are air assisted to ensure the operation remains smokeless at low flow rates. Subsequent burner stages achieve smokeless burning through the use of gas pressure.

The multipoint burners were organised in ten solid rows and one staggered row, with each burner row served by two continuous burning pilots. Two additional pilots were installed on the field's single air assisted flare, to handle ethylene flow rates occurring below the staging pressure for the first stage of the multipoint array. The air flare design maintains continuous operation whenever the ethylene flare field is online, handling low pressure minimal flow rates, as well as higher gas pressure ranges. On each row, there is an automated staging valve with a pressure relief device for bypass in the event the staging valve does not open.

Design features are built-in to add burner capacity through the staging control system, and limit turndown by removing burner capacity at lower pressures. The model used a pre-calculated ethylene flow rate of more than 1 million kg/hr, and applied it on a volume average basis over the analogous coarse grid burner region. On each burner tip, the port area was used to allocate the total flow to each row of burners in the flare system. The adiabatic flame temperature of ethylene at 12% oxygen was pre-calculated and used as the peak allowable temperature in the model in order to compensate for the inability of the coarse grid to properly represent the mixing in the near burner domain. Additionally, a single

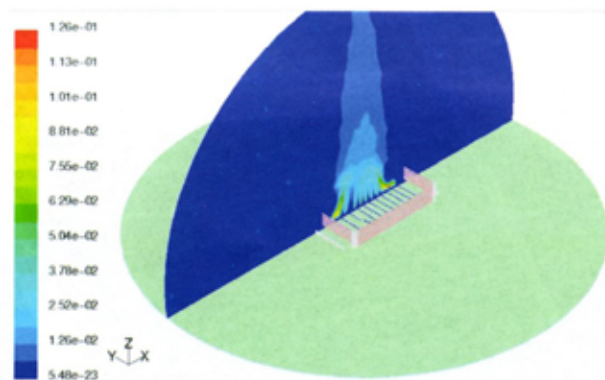


Figure 4. Contours of mole fraction of CO_2

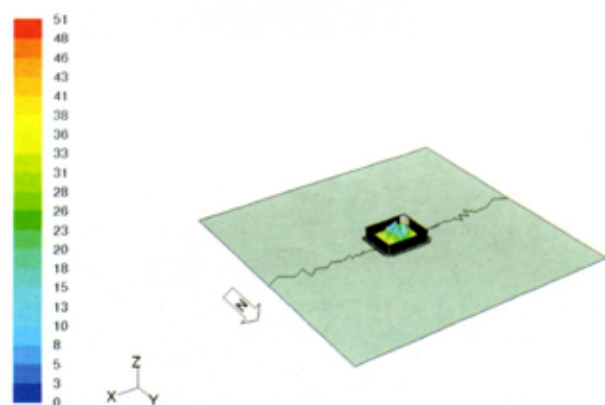


Figure 5. Iso-surface of 2000 ppm CO (dry) believed to be a reasonable representation of the visible flame surface. The scale gives the radial coordinate from the flare centreline in metres.

flare tip was modelled and run individually in order to use the volume average turbulence kinetic energy and turbulence dissipation rate scalars calculated from the fine scale model in the large scale model.

Low visibility design provisions

The burners are enclosed by a radiation fence. Beyond shielding sight of the flares during burner operation, the fence also protects personnel and equipment from radiant heat, especially at the staging manifold where operator access is required for maintenance.

Access and radiation through vented sections is eliminated by fencing panels supported by the main fence knee braces. The fourth side of the fence faces staging headers, and is solid to provide plant personnel complete access to the area during flare operations.

Service life considerations

In addition to the expertise of the design team, the modelling provides the data to fine tune the plant flare system through features and components that predict the potential for trouble free operation over a long service life. Per the team's specifications, the burners are investment cast to ensure dimensional accuracy and performance repeatability. An added benefit of utilising castings is that they remove the necessity to drill orifices. Casting the holes leaves behind no sharp edges, eliminating the risk of stress risers and, thus, the cracks commonly found in conventional flare burners.

To promote mixing, it is critical for multipoint flares to operate with sufficient kinetic energy levels in their combustion zone, and the burner design determines its ability to provide mixing over the widest possible range of flow. The burner is a spider type configuration with a centre hub acting as a stability point for the assembly, to ensure combustion through a wide range of compositions and turndowns.

Additionally, in a departure from conventional high pressure burner design, a web under each arm of the burner provides reinforcement to the arm and limits thermal expansion. This also limits the resultant stresses which might otherwise form cracks where each arm meets the central hub. The hollow web supplies optimum flow to the outermost holes on the spider, which ensures that the gas will reach the arc of the burner with the greatest access to air.

Controlling turndown, through the use of the burner staging system, proportions the number of burners in service to the flow rate of waste gas to be flared. This overcomes the likelihood of improper staging, which can result in excessive burner temperatures, reduced burner life, and smoking burners.

Performance summary

CFD modelling and subsequent testing proved that by using a vertical, rather than angular burner orifice pattern, flame length is reduced and not only improves mixing, but also dramatically decreases recirculation on the hub. This, in turn, lowers hub temperature and lessens the potential for burner cracking and plugging.

Pulled burner connections on the manifolds minimise pressure drop to improve gas flow into the burner risers. Full penetration welds ensure solid mechanical connections. In comparison, conventional burner

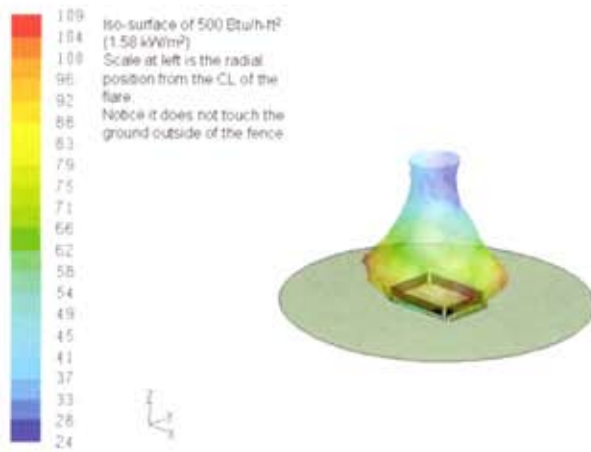


Figure 6. Iso-surface of 1.58 kW/m^2 . The scale is the radial position from the centreline of the flare in metres.

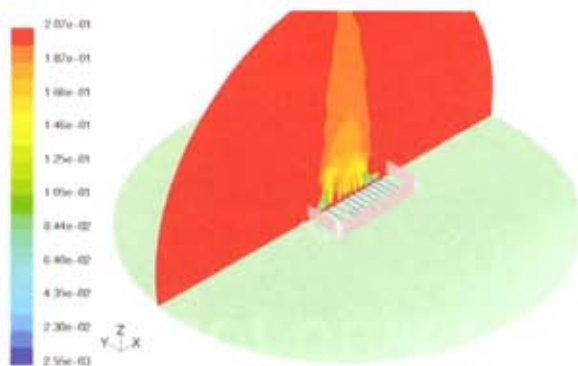



Figure 7. Contours of mole fraction of O_2 .

connections, unlike the spider design burners employed at the Middle East plant, can only provide access for welding from a single side, leaving crevices that invite the propagation of cracks during thermal cycling and ultimately lead to premature burner failure.

Conclusion

The flare system the engineering team designed and installed for the Middle East plant has successfully demonstrated its ability, under all operating conditions, to meet the owner's requirement for safe operation, reduced noise, flare emissions and flare visibility. Although the system has already proven highly reliable in actual production operations, it is also capable of fully automated operation and is being cost effectively maintained with minimal downtime.

The efficient design, straightforward construction and provisions for future expansion, promises to combine with low operating costs and low burner flame visibility to enable environmentally friendly multipoint flare operations that are capable of meeting the Middle East plant's needs for many decades. 

DID YOU KNOW.....

- HUNDREDS OF FLARES IN SERVICE GLOBALLY
- OVER 27 MULTIPOINTS INSTALLED ON SIX CONTINENTS.....ASIA, EUROPE, AFRICA, NORTH AMERICA, SOUTH AMERICA AND AUSTRALIA.
- QUALITY CONTROL ISO 9001:2000
- FIVE OFFICES WORLDWIDE

NOW THAT YOU KNOW.....

CALL CALLIDUS TECHNOLOGIES

USA, Corporate Headquarters:

Phone: +1 918 496 7599

Web: www.callidus.com

London, UK:

Phone: +44 14 8327 0360

Shanghai, China:

Phone: +86 21 6875 7533

Mumbai, India:

Phone: +91 22 2582 2639

Tokyo, Japan:

Phone: +81 44 742 5100

TECHNOLOGY

EXPERIENCE

PROFESSIONALISM

INTEGRITY